

FIBER TRANSITION BREAKOUT UNIT - TRBR01



Browse on Mobile

 [Browse on Web](#)

NEXCONEC® Transition Breakout Box solution is designed for enhanced cable management that helps to organize the incoming cable into separate conduits which will connect to the NGX or LGX splice modules or any other splicing unit. The breakout box is designed to support up to 144FO.

FEATURES

- ✓ Accepts up to 2 loose tube cables of 144FO
- ✓ 2 conduits insert for 5mm and 10mm
- ✓ Up to 6 conduits of 10mm
- ✓ Up to 12 conduits of 5mm
- ✓ Rackable Units into 1U Chassis 8 slots




APPLICATIONS

- ✓ Enterprise network & Datacenter
- ✓ Indoor application

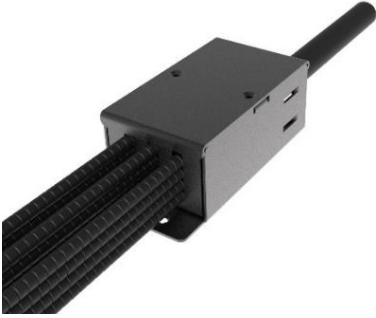

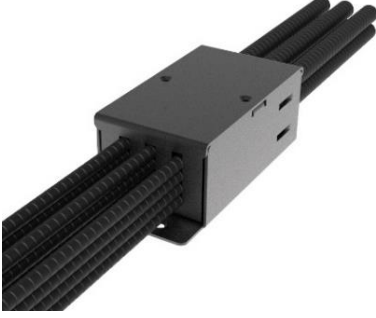
SPECIFICATIONS

Material	Cold rolled steel
Housing Color	Black 9004
Application	Indoor IP20
Dimensions (W x D x H in MM)	50.5*130*37.20
Net Weight	0.3 Kg
Number of Tubes	Up to 12 with 5mm conduits / 6 with 10mm conduits
Fiber Capacity	144FO
Fixation	Zero U, with screws
Accessories	Cable Strength member Retainer, 2x Plastic Cable ties, 1x Metal Cable tie

ORDER INFORMATION

Product	Part Number	Product Description
	TRBR01	Fiber Transition Breakout Unit
	TRTB5	Corrugated Conduit (Ø 7.5mm, Inner Ø 4.5mm) Roll of 400 meter
	TRTB10	Corrugated Conduit (Ø 11.5mm, Inner Ø 8.5mm) Roll of 200 meter

APPLICATIONS

FO Cable to 12 Conduits 5mm	FO Cable to 6 Conduits 10mm	12 Conduits 5mm to 6 Conduits 10mm
		

TECHNICAL DRAWING

