


MICRO CABLE - SINGLE JACKET

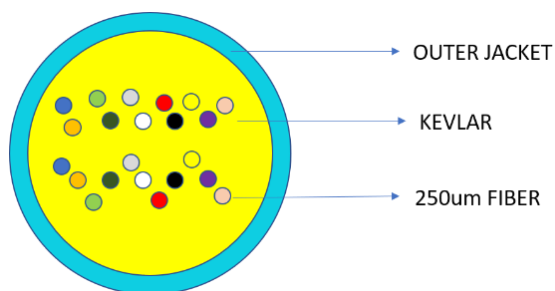


Browse on Mobile

 Browse on Web

NEXCONEC Micro Cable Single Jacket is made of 2-24, 250um fibers covered with aramid strength member and LSZH jacket. The cable is compact and fits up to 24F in a 3mm outer diameter.

FEATURES

- ✓ Conform to IEC, EIA-TIA and Telcordia performance requirements
- ✓ Standard SM and MM options available
- ✓ Individually colored fibers
- ✓ RoHS, REACH & SVHC compliant
- ✓ CPR Euro classes certified on demand 

APPLICATIONS

- ✓ Ideal for internal inter-connect using MTP or MPO connectivity
- ✓ Specifically use for high density connectivity including data centers

SPECIFICATIONS

Parameter	Unit	Value
Fiber Core		2 to 24FO
Outer Diameter	mm	3.0
Tensile Strength (Long Term)	N	80
Tensile Strength (Short Term)	N	200
Crush Resistance (Long Term)	N/100mm	150
Crush Resistance (Short Term)	N/100mm	500
Storage Temperature	°C	-20 ~ +70
Operating Temperature	°C	-20 ~ +70
Cable Weight	Kg/Km	4.5 to 7.8
CPR Reaction to Fire Classification	Certified	Cca-s1a,d0,a1 (8FO & 12FO)

ORDER INFORMATION

CF	1	2	3	4	5
----	---	---	---	---	---

CF	1	CABLE CONSTRUCTION	2	FIBER COUNT	3	FIBER	4	JACKET COLOR	5	JACKET MATERIAL
S	MICRO SINGLE	2-24		2D	G652D	Y	YELLOW	L	LSZH	
				A1	G657A1	O	ORANGE	C	PVC	
				A2	G657A2	Q	AQUA	R	OFNR	
				O1	OM1	V	ERICA VIOLET	P	OFNP	
				O2	OM2	G	LIME GREEN	LC	LSZH Cca	
				O3	OM3	B	BLACK			
				O4	OM4					
				O5	OM5					

FIBER COLOR CODE IN COMPLIANCE WITH TIA 598-C

BLUE		1	RED		7
ORANGE		2	BLACK		8
GREEN		3	YELLOW		9
BROWN		4	PURPLE		10
GREY		5	PINK		11
WHITE		6	AQUA		12

(B) INDICATES BLACK RING

BLUE		13(B)	RED		19(B)
ORANGE		14(B)	BLACK		20(B)
GREEN		15(B)	YELLOW		21(B)
BROWN		16(B)	PURPLE		22(B)
GREY		17(B)	PINK		23(B)
WHITE		18(B)	AQUA		24(B)

