

NGX CS[®] PATCHING CASSETTE - NGXPTCxx



Browse on Mobile

 Browse on Web

NEXCONEC[®] NGX CS[®] Patching Cassettes are specifically designed for direct patching of assemblies, eliminating the need for transitions or splicing and thereby significantly reducing link loss. Each cassette comes preloaded with high-quality CS[®] adapters, ensuring seamless and reliable connections.

Offering an ultra-high-density solution, these cassettes support up to **216 fibers (6 x 36F)** while occupying just 1U of rack space when installed in the NGX 1U 6-slot chassis, making them ideal for maximizing fiber capacity in space-constrained environments.

FEATURES

- ✓ Conform to IEC, EIA-TIA, and Telcordia performance requirements
- ✓ Preloaded with high-performance CS[®] adapters
- ✓ Available in standard Single mode and Multimode options
- ✓ RoHS, REACH & SVHC compliant, Materials Conflict compliant
- ✓ Flame retardant PC+ABS material

APPLICATIONS

- ✓ Telecommunication networks
- ✓ Data centers, Co-location DC
- ✓ LAN or Campus Wide Network
- ✓ Broadband network
- ✓ Supports SFP, QSFP, CFP applications


SPECIFICATIONS

Parameters	Value
Footprint	NGX
Dimensions (WxDxH)	191.20 x 116 x 12.60 mm
Material	PC+ABS
Housing Color	Black
Application	NGX Panels
Fiber Capacity	Up to 36FO
Adapter Type	CS® Triple Channel 6F
Number of CS® Adapter Ports	6 Ports
Compliance	RoHS, REACH & SvHC
Operating Temperature	-10 ~ +60°C
Weight	0.25 Kg

ORDER INFORMATION


Product	Part Number	Product Description
	NGXPTC01	NGX Patching Module 36FO CS® SM Blue Adapters
	NGXPTC02	NGX Patching Module 36FO CS® SM Green Adapters
	NGXPTC03	NGX Patching Module 36FO CS® MM Aqua Adapters

TECHNICAL DRAWING

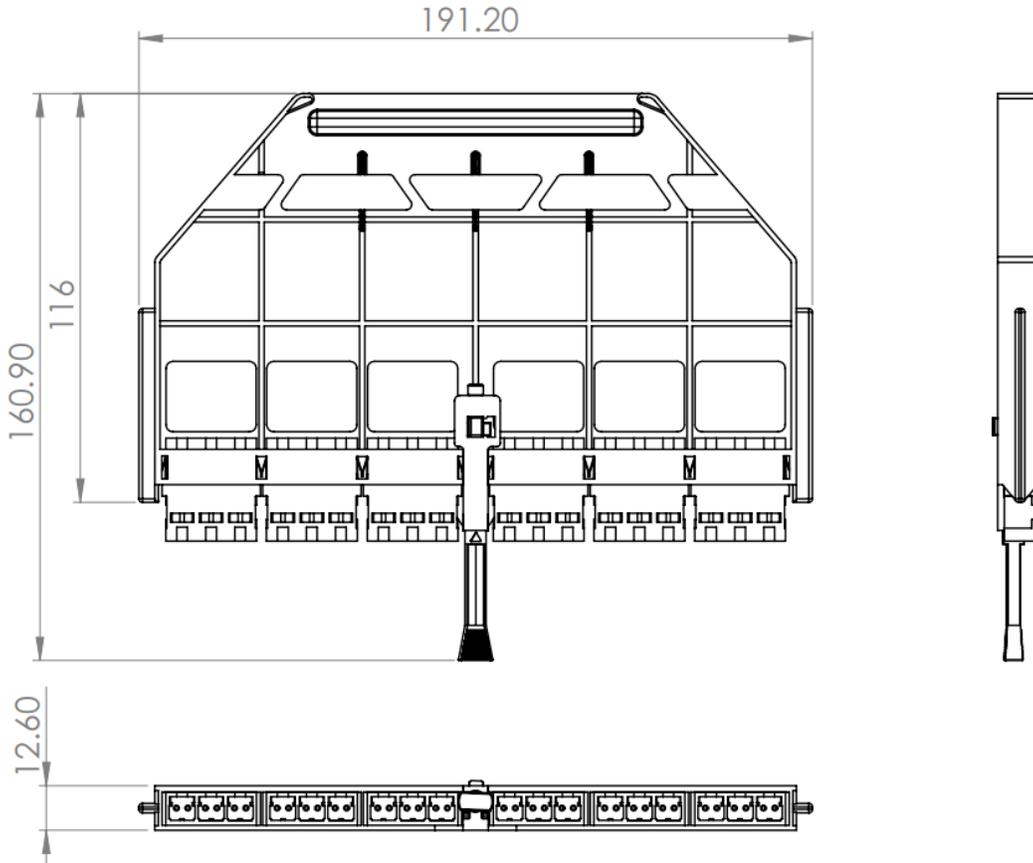

RELATED PRODUCTS AND ACCESSORIES

Product	Part Number	Product Description
	NGXPP01	1U 6 Slots NGX Modular Patch Panel Unloaded
	NGXPP02	1U 6 Slots NGX Angled Modular Patch Panel Unloaded

	<p>NGXPP03</p>	<p>1U 6 Slots NGX Hybrid Modular Patch Panel Unloaded</p>
	<p>NGXPP04</p>	<p>NGX Hybrid Angled Modular Chassis 1U Fiber/Copper (6 Fiber NGX Slots / 12P KJ) Unloaded</p>
	<p>NGXPP21</p>	<p>2U 12 Slots NGX Modular Patch Panel Unloaded</p>
	<p>NGXBK01</p>	<p>Zero RU NGX Bracket, 3 Slots Unloaded</p>